




# Pocono Pool Products

Company Name: \_\_\_\_\_ Cust. Name/PO#: \_\_\_\_\_  
 Phone: \_\_\_\_\_ Cell: \_\_\_\_\_ Name of Contact: \_\_\_\_\_

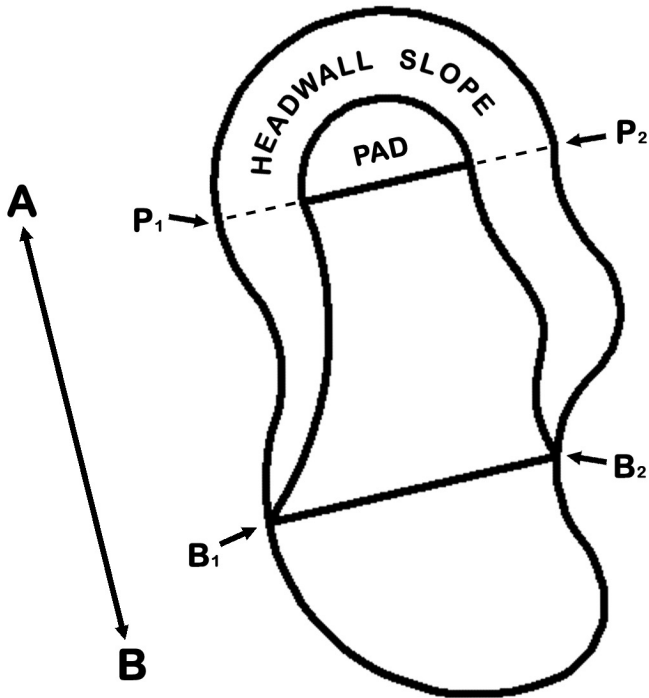

Distance from A to B should be at least 10', the further apart, the better. The line that A & B represent, cannot cross or come within 5' of the pool.

Number points around perimeter of pool, approximately every 3 feet. Use more points for tighter (smaller) radiuses and less for large radiuses. For straight panels, use 1 point at each end and 1 in the middle.

Place a point at all transitions (where radiuses change). Use panel joints (not coping joints) wherever possible.

Measure from both A & B to all points around pool. Include both sides of Break (B<sub>1</sub> & B<sub>2</sub>) and points where the pad-line intersects with pool wall (P<sub>1</sub> & P<sub>2</sub>). Also, include any other points that might be necessary (i.e. steps).

Distance from A to B: \_\_\_\_\_

Wall Height: \_\_\_\_\_

Depth (Measured at Edge of Pad): \_\_\_\_\_

Pt	A	B
B <sub>1</sub>		
B <sub>2</sub>		
P <sub>1</sub>		
P <sub>2</sub>		

Distance from B<sub>1</sub> to B<sub>2</sub>: \_\_\_\_\_

Distance from P<sub>1</sub> to P<sub>2</sub>: \_\_\_\_\_

Headwall Slope: \_\_\_\_\_

**Sketch Showing Orientation and Shape of Pool.**  
 Include Location of Points A & B

## Kidneys & Freeforms

(Include A - B Sheet)

Carlton Rd, Swiftwater, PA

Phone: (570) 839-9291 Fax: (570) 839-6915

15 Krey Blvd., Rensselaer, NY

Phone: (518) 283-1023 Fax: (518) 283-1059